

# Produkt-Datenblatt

## Technische Daten, Spezifikationen

### Kontakt

**Technischer und kaufmännischer Vertrieb, Preis-  
auskünfte, Angebote, Test-Geräte, Beratung vor Ort:**

Tel: (0 81 41) 52 71-0

FAX: (0 81 41) 52 71-129

Aus dem Ausland:

Tel: ++49 - 81 41 - 52 71-0

FAX: ++49 - 81 41 - 52 71-129

E-Mail: [sales@meilhaus.com](mailto:sales@meilhaus.com)

### Internet:

[www.meilhaus.com](http://www.meilhaus.com)

Web-Shop:

[www.MEsstechnik24.de](http://www.MEsstechnik24.de) | [www.MEasurement24.com](http://www.MEasurement24.com)

### Web Kontakt-Formular:

[www.meilhaus.de/infos/Kontakt.htm](http://www.meilhaus.de/infos/Kontakt.htm)

### Per Post:

Meilhaus Electronic GmbH

Am Sonnenlicht 2

D-82239 Alling bei München

**MEsstechnik fängt mit ME an.**

[www.meilhaus.com](http://www.meilhaus.com)


Erwähnte Firmen- und Produktnamen sind zum Teil  
eingetragene Warenzeichen der jeweiligen Hersteller.  
Preise in Euro zzgl. gesetzl. MwSt. Irrtum und Änderung  
vorbehalten.

© Meilhaus Electronic bzw. Hersteller:  
[www.meilhaus.de/infos/impressum.htm](http://www.meilhaus.de/infos/impressum.htm)


  
**MEILHAUS**  
**ELECTRONIC**

# Isolated Transmitters: 600T Series

## 657T, 658T Multi-Channel, Two-Wire Transmitters

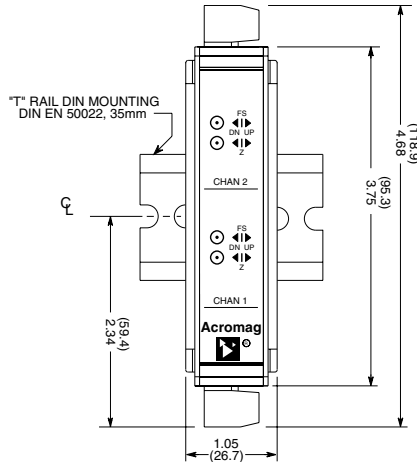

NOTE: ALL DIMENSION ARE IN INCHES (MILLIMETERS)

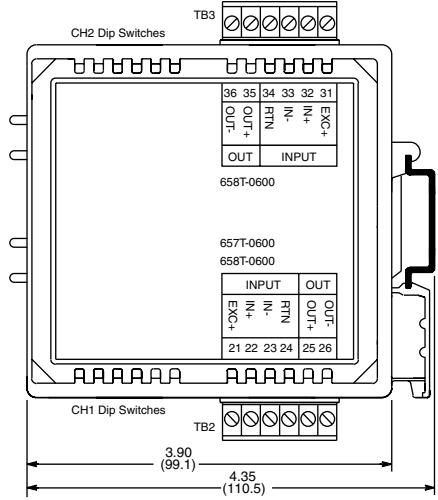

### RTD / resistance input ♦ Single/dual channel loop-powered transmitter

#### Description

##### Models

- 657T: Single RTD input channel
- 658T: Dual RTD input channels

These units accept universal RTD or resistance input signals and output proportional DC current signals. The output can also be linearized to the input sensor signal. Single-channel 657T and dual-channel 658T units are ideal for panel shops and end-users who require a high-density signal conditioner that can accommodate a broad range of temperature measurement applications.

Configuration is fast and easy. First, you select the input type with a simple DIP switch. Then, you set your zero/full-scale output values using a toggle switch on the front panel to increase or decrease the signal until you read the desired output value on your voltmeter. The toggles make it easy to calibrate a normal (proportional) or reverse-acting (inverse) response in seconds. After completing the calibration, just press the mode/set toggle and your configuration settings are safely saved to nonvolatile memory.

#### Input Ranges

RTD: 100 ohm Pt, 120 ohm Ni, 10 ohm Cu  
Resistance: 0 to 500 ohms

#### Output Range

4 to 20mA DC

#### Power Requirement


12 to 50V DC (loop-powered)  
Two-wire transmitter

#### Approvals


UL, cUL listed  
Class I; Division 2; Groups A, B, C, D.

#### Key Features & Benefits

- Selectable RTD input types offer flexibility to fit many applications.
- DIP switch-configuration and self-ranging technologies speed installation without pots, jumpers, or software.
- Toggle-switch calibration simplifies field adjustments for faster and easier maintenance.
- Configuration lockout safety feature prevents tampering and accidental changes.
- Reverse-acting output capability enables inverse proportional control signals.
- Dual channel model saves space and reduces equipment costs.
- High-resolution S-D A/D converters deliver superior accuracy for reliable measurements.
- Lead break detection supports upscale or downscale failsafe mode.

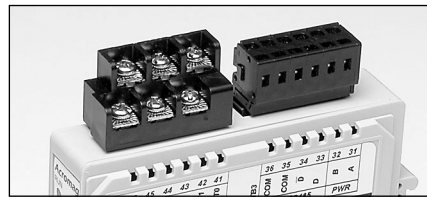

Optional terminal blocks: barrier strip (left) and spring clamp (right). Cage clamp terminal is standard.

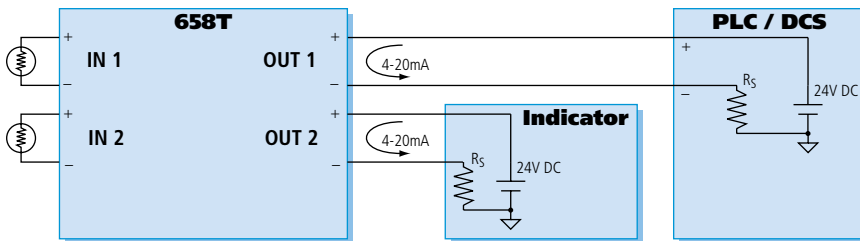

# Isolated Transmitters: 600T Series



## Performance Specifications

### ◆ General Input

**Analog to Digital Converter (ADC)**  
16-bit S-D A/D converter.

### Noise Rejection

Normal Mode: Better than 40dB @ 60Hz.  
Common Mode: Better than 100dB @ 60Hz.

### Input Overvoltage Protection

Bipolar Transient Voltage Suppressors (TVS).

### Input Impedance

400K ohm at 10mV span;  
input current,  $\pm 25$ nA, typical ( $\pm 30$ nA, max.).

### ◆ RTD Input

#### RTD Input Ranges

100 Ohms, 120W Ni, or 10W Cu; user-configured.

RTD	°C Range (°F Range)	Accuracy
Pt1	-200 to 850°C (-328 to 1562°F)	$\pm 0.25$ °C
Pt2	-200 to 850°C (-328 to 1562°F)	$\pm 0.25$ °C
Ni	-80 to 320°C (-112 to 608°F)	$\pm 0.25$ °C
Cu	200 to 260°C (-328 to 500°F)	$\pm 1.00$ °C

Alpha: Pt1 (a = 1.3850), Pt2 (a = 1.3911),  
Ni a = 1.6720, Cu (a = 1.4272).

2, 3, or 4-wire configurations supported. Module provides sensor excitation, linearization, lead-wire compensation, and sensor break detection.

#### RTD Excitation Current

0.5mA DC typical, all types.

#### RTD Lead-Wire Compensation

25 ohms per lead.

#### RTD Break Detection

Configurable for either upscale or downscale.

### ◆ Resistance Input

**Resistance Input Range**  
0 to 500 ohms.

**Resistance Accuracy**  
 $\pm 0.05$  ohms.

### ◆ Output

#### Output Range

Range: 4 to 20mA DC, 3.8 to 22mA range typical.

#### Output Compliance

$R_{load} = (V_{supply} - 12V) / 0.02A$

#### Output Response Control

Proportional/inverse selectable.

#### Ambient Temperature Effect

Better than  $\pm 0.006\%$  of input span per °C or  $\pm 100$ ppm/°C, whichever is greater.

#### Output Response Time (for input step change)

700mS typical to 98% of final output value.

### ◆ Environmental

#### Ambient Temperature

Operating: -25 to 75°C (-13 to 167°F).

Storage: -40 to 85°C (-40 to 185°F).

#### Relative Humidity

5 to 95%, noncondensing.

#### Power Requirement

12 to 50V DC @ 25mA for each output channel.

#### Isolation

Not isolated.

#### Radiated Field Immunity (RFI)

Complies with EN61000-4-3 Level 3 and EN50082-1.

#### Electromagnetic Field Immunity (EMI)

Less than  $\pm 0.25\%$  of output span effect.

#### Electrical Fast Transient (EFT)

Complies with EN61000-4-4 Level 3 and EN50082-1.

#### Electrostatic Discharge (ESD)

Complies with EN61000-4-2 Level 3 and EN50082-1.

#### Radiated Emissions

Meets or exceeds EN50081-1 for Class B equipment.

#### Approvals

UL & cUL listed.

Hazardous Locations: Class I: Div. 2; Groups A, B, C, D.

### ◆ Physical

#### Enclosure

Case: Self-extinguishing NYLON type 6.6 polyamide thermoplastic UL94 V-2 NEMA Type 1 enclosure.

#### Connectors (Removable Terminal Blocks)

Wire Range: AWG #12-24.

#### Printed Circuit Boards

Military grade FR-4 epoxy glass circuit board.

#### Dimensions

1.05W x 4.68H x 4.35D inches.

26.7W x 118.9H x 110.5D millimeters.

#### Shipping Weight

1 pound (0.45 Kg) packed.

## Ordering Information

### ◆ Models

**657T-0600 (add "-C" for factory calibration)**  
Single channel RTD 2-wire transmitter

**658T-0600 (add "-C" for factory calibration)**  
Dual channel RTD 2-wire transmitter

Add "-C" suffix for optional factory configuration.

### ◆ Accessories (see Page 21)

#### P55R-VD24

Power supply (24V DC, 2.5A).

#### TBK-B01

Optional terminal block kit, barrier strip style, 2 pcs.

#### TBK-S01

Optional terminal block kit, spring clamp style, 2 pcs.

#### DIN RAIL 3.0

#### DIN RAIL 16.7

DIN rail strip, Type T, 3 inches (75mm) or 16.7 inches (425mm)

#### 20RM-16-DIN

19" rack-mount kit with DIN rail.  
Holds sixteen 650T transmitters.

